



# SINGLE HANDLE FAUCET INSTRUCTION MANUAL



# **Installation Manual**



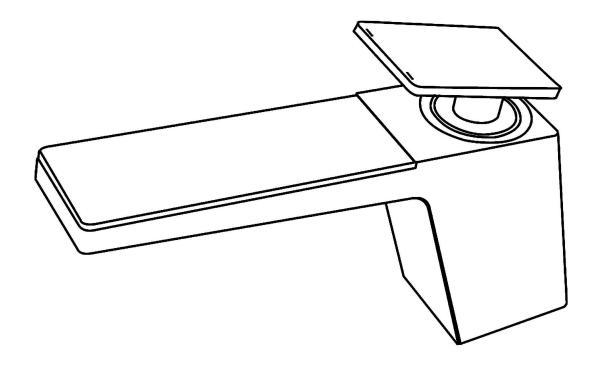

For customer support or assistance with product installation, please feel free to contact us: Email: support@rainly.io

Our dedicated support team is available to assist you and provide the best customer service experience. Please don't hesitate to reach out if you have any questions or encounter any issues.

# 1 Installation Guidelines

- 1. After opening the product packaging, check the parts against the "Included Items" to make sure that all parts are present. If any parts are missing, please contact your local dealer immediately.
- 2. Your sink should match the installation dimensions of this product.
- 3. The faucet cartridge in the main body has already been calibrated at the factory. Disassembly is not recommended.
- 4. The hot water pipe connection should be marked with a red label or ring, and the cold water pipe connection should be marked with a blue label or ring. If the hot and cold water pipe connections are reversed, the red and blue markings on the faucet handle will be opposite to the actual water temperature. Please verify that the hot and cold water pipe connections are correct before turning on the water supply.
- 5. Before installing the faucet, flush the pre-embedded water pipes to remove any dirt or sediment to avoid clogging and ensure smooth water flow.
- 6. After installation, check all joints and connections for leaks.
- Inlet water pressure requirements: 0.05MPa ≤ inlet water pressure ≤ 0.75MPa (including cold water pressure)








### Recommended tools:








Allen key




Flat screwdriver Cross screwdriver

# 2 Included Items


NO.	Item	Quantity
1	Faucet Body	1
2	O-Ring	1
3	Rubber Gasket	1
4	Stainless Steel Gasket	1
5	Nut	1
6	Inlet Water Hose (Red, Blue)	2

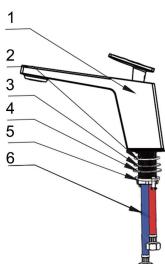


3 Dimension Diagram

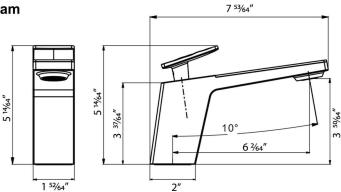

## 4 Installation Steps



 Please flush the water pipe for at least 2 minutes before installing the faucet. Ensure there are no impurities in the running water and that the angle valves adequately supply hot and cold water.




Insert the red inlet pipe (2) into the faucet's main body (1) according to the hot and cold markings and tighten it correctly.




Install the O-ring at the bottom of the faucet and pass the red inlet hose connected to the faucet through the threaded pipe.



 Pass the blue inlet hose (2) through the threaded pipe (from the previous step) and tighten it with the faucet body, then pull up and tighten the threaded pipe at the bottom of the faucet.



5. Pass the installed threaded pipe (from the last step) of the faucet through the basin installation hole and install the provided gasket and nut from the bottom. Adjust the direction of the faucet and then tighten the nut. Tighten the screw with a screwdriver to reinforce it properly.



6. Connect the inlet hose (2) to the angle valve (note: the red tube connects to the hot water angle valve, and the blue tube connects to the cold water angle valve) and tighten and turn on the angle valve. Check the inlet hose, the angle valve, and the main body of the faucet to see whether any of them are leaking. If no leak can be seen, the installation process is completed.

# **5** Faucet Care And Maintenance

### a. To keep the faucet surface bright and clean, please clean the faucet regularly:

- 1. Use clean water to wash the faucet and wipe it dry with a soft cotton cloth.
- 2. Avoid using cleaning powder, polishing powder, and other abrasive detergents or nylon brushes, as this may scratch and corrode the product.
- 3. Do not use acidic cleaning agents to wash the faucet, as this may cause corrosion on the surface of the faucet. If the faucet comes into contact with harmful acidic agents, rinse it off with water immediately.

### b. If you need to do a deep cleaning, please follow the following steps:

- 1. Use clean water and a soft cloth to remove as much surface dirt and grime as possible.
- 2. Use any of the following cleaning agents to remove surface dirt and grime:

Mild liquid cleanser

Colorless glass cleaner that does not have abrasive properties and

can be completely dissolved (according to instructions)

Polish liquid that does not have abrasive properties

3. After cleaning, rinse off all of the cleaning agent with clean water and wipe dry with a soft cotton





